

RADIAL LEADS CERAMIC CAPACITOR



FEATURES

Capacitance: 0.5pF~330μF

Voltage: 4V~3KV

Size:0805~2225

Lead-free terminations, ROHS and REACH Compliant

» APPLICATIONS

Typical applications include critical timing, tuning, circuits requiring low loss, circuits with pulse, high current, decoupling, bypass, filtering, transient voltage suppression, blocking and energy storage.

» ORDERING INFORMATION

CC4 — 0805 — CG — 50V — 100pF — J — H — L — T								
Series	Case Size	Dielectric	Rated Voltage	Capacitance	Capacitance Tolerance	Wire Form		Packaging
						Leg Form	Leg Length	
CC4- Class I	0805	CG	4V 6.3V	Refer to Capacitance	<10pF C=±0.25pF D=±0.50pF ≥10pF J=±5%	L H If there are no special requirements for leg form and leg length, do not indicate them		T=Bulk packaging (default)
	1206		10V 16V					
	1210		25V 50V					
	1812		100V 200V					
CT4G- Class II	250V 500V	2X1 X5R	250V 500V					
	2225		630V 1KV 2KV 3KV		K=±10% M=±20%			

Note: 2X1=X7R

» DIMENSIONS

Size Code	0805	0805	1206	1210	1812	2225
Wmax	4.85	4.85	5.86	5.86	7.14	8.62
Hmax	4.16	4.16	4.36	4.80	6.00	8.62
Tmax	3.70	3.70	4.10	4.20	4.20	4.20
F	2.54±0.1	5.08±0.1	5.08±0.1	5.08±0.1	5.08±0.12	5.08±0.12
d	0.5±0.05	0.5±0.05	0.5±0.05	0.5±0.05	0.6±0.05	0.6±0.05
Length(Lmin)	25.4	25.4	25.4	25.4	25.4	25.4
Appearance						
Leg Form	L	H		H		H

RADIAL LEADS CERAMIC CAPACITOR


» ELECTRICAL CHARACTERISTICS

No.	Item		Specification Limits	Measuring Conditions
1	Capacitance		Within specified tolerance	
2	Dissipation Factor	CG 2X1 X5R	$C_R \leq 30\text{pF} \quad \text{tg } \delta \leq \frac{1}{(400+20C_R)}$ $C_R > 30\text{pF} \quad \text{tg } \delta \leq 10 \times 10^{-4}$ $4\text{V} \leq U_R < 16\text{V} \quad \text{tg } \delta \leq 1000 \times 10^{-4}$ $16\text{V} \leq U_R < 25\text{V} \quad \text{tg } \delta \leq 700 \times 10^{-4}$ $25\text{V} \leq U_R < 50\text{V} \quad \text{tg } \delta \leq 500 \times 10^{-4}$ $U_R \geq 50\text{V} \quad \text{tg } \delta \leq 350 \times 10^{-4}$ ※Note: $C_R \geq 1\mu\text{F} \quad \text{tg } \delta \leq 10\%$;	CG: $C_R \leq 1000\text{pF} \quad 1\text{MHz} \pm 10\% \quad 0.5\text{V} \sim 5\text{V}$ $C_R > 1000\text{pF} \quad 1\text{kHz} \pm 10\% \quad 1\text{V} \pm 0.2\text{V}$ 2X1 & X5R: $C_R \leq 10\mu\text{F} \quad 1\text{kHz} \pm 10\% \quad 1\text{V} \pm 0.2\text{V}$ $C_R > 10\mu\text{F} \quad 120\text{Hz} \pm 10\% \quad 0.5\text{V} \pm 0.2\text{V}$
3	Insulation Resistance		10000MΩ or 100MΩ·μF whichever is less	Voltage shall be applied with follow conditions: $U_R \leq 500\text{V} \quad U_R$ $U_R > 500\text{V} \quad 500\text{V}$ Voltage applying time shall be 60±5 seconds. Charging and discharging current shall be 50mA or less.
4	Dielectric Strength		No breakdown or visual defects	$U_R \leq 100\text{V} \quad 2.5U_R$ $100\text{V} < U_R \leq 200\text{V} \quad 1.5U_R + 100\text{V}$ $200\text{V} < U_R \leq 500\text{V} \quad 1.3U_R + 100\text{V}$ $U_R > 500\text{V} \quad 1.3U_R$ Voltage applying time shall be 5 seconds. Charging and discharging current shall be 50mA or less.

» PACKAGING

PACKAGING STYLE

T=Bulk,A=Tape/Reel (Figure 1、 Figure2) , Z=Tape/Ammo (Figure 3)

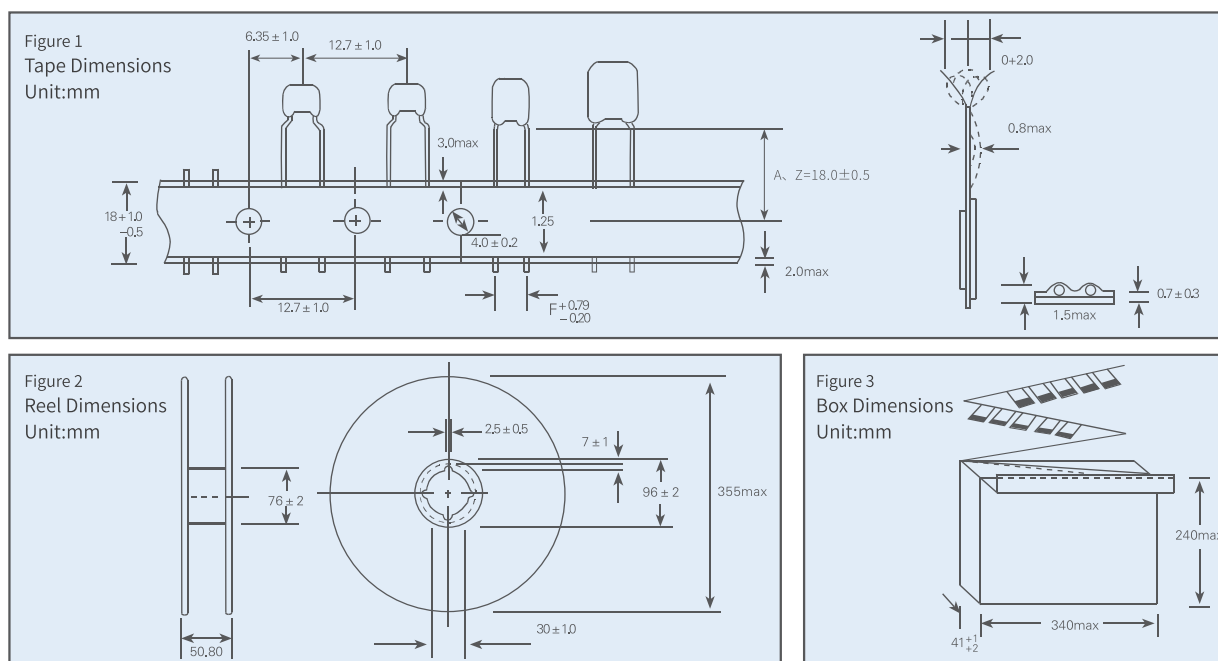

RADIAL LEADS CERAMIC CAPACITOR

» CAPACITANCE AND RATED VOLTAGE RANGE

CC4

Size Code			0805							1206							1210							1812							2225															
Wire Form			L.H							H							H							H							H															
Rated Voltage(V)			50	100	200	250	500	630	1k	50	100	200	250	500	630	1k	2k	3k	50	100	200	250	500	630	1k	2k	3k	50	100	200	250	500	630	1k	2k	3k	25	50	100	200	250	500	630	1k	2k	3k
cap	0.5	1.0																																												
	1.2	1.5																																												
(pF)	1.8	2.2																																												
	2.7	3.3																																												
	3.9	4.7																																												
	5.6	6.8																																												
	8.2																																													
	10																																													
	12																																													
	15																																													
	18																																													
	22																																													
	27																																													
	33																																													
	39																																													
	47																																													
	56																																													
	68																																													
	82																																													
	100																																													
	120																																													
	150																																													
	180																																													
	220																																													
	270																																													
	330																																													
	390																																													
	470																																													
	560																																													
	680																																													
	820																																													
	1000																											</																		

» CAPACITANCE AND RATED VOLTAGE RANGE

[illegible]

RADIAL LEADS CERAMIC CAPACITOR

» CAPACITANCE AND RATED VOLTAGE RANGE

CT4G

Size Code	1812												2225									
Wire Form	H												H									
Rated Voltage(V)	6.3	10	16	25	50	100	200	250	500	630	1k	2k	3k	50	100	200	250	500	630	1k	2k	3k
cap 100																						
(pF) 120																						
150																						
180																						
220																						
270																						
330																						
390																						
470																						
560																						
680																						
820																						
1000																						
1200																						
1500																						
1800																						
2200																						
2700																						
3300																						
3900																						
4700																						
5600																						
6800																						
8200																						
cap .010																						
(μF) .012																						
.015																						
.018																						
.022																						
.027																						
.033																						
.039																						
.047																						
.056																						
.068																						
.082																						
.10																						
.12																						
.15																						
.18																						
.22																						
.27																						
.33																						
.39																						
.47																						
.56																						
.68																						
.82																						
1.0																						
1.5																						
2.2																						
3.3																						
4.7																						
6.8																						
10.0																						
22.0																						
33.0																						
47.0																						
100.0																						
150.0																						
220.0																						

2X1
X5R